

# CT-TPR-13-1-super


## SECOND GENERATION TPR COATED HEAVY DUTY FABRIC

### FEATURES:

- ◆ Temperature resistant
- ◆ Abrasion resistant
- ◆ Tear resistant, EPDM rubber coated fabric
- ◆ Chemical and moisture resistant
- ◆ Hot air and wedge weldable

### TYPICAL APPLICATION:

- ◆ Custom slit product: Flexible duct production for permanent and temporary ventilation
- ◆ Full size rolls: Weldable water proof rubber fabric membrane in roofing and construction applications

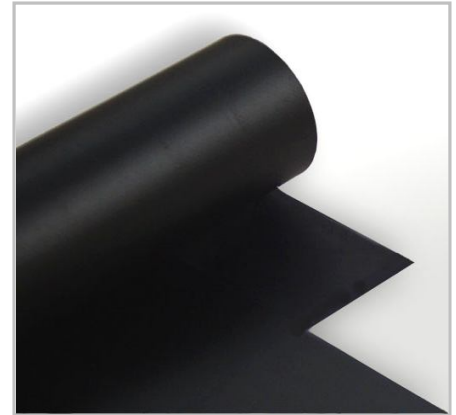

PROPERTIES	Value (Metric)	Value (English)	Test Method
Construction	Base fabric: non-woven polyester Both sides TPR coated	Base fabric: non-woven polyester Both sides TPR coated	
Thickness	0.45 mm	17.5 mil	ASTM D 751
Total area weight	426 g/m <sup>2</sup>	12.5 oz/yd <sup>2</sup>	ASTM D 3776
Tensile (breaking) strength (MD)	1202 N/ 50mm	135 lbs/ inch	ASTM D 751
Tensile (breaking) strength (TD)	933 N/ 50mm	105 lbs / inch	ASTM D 751
Tear strength (MD)	88 N	20 lbs	ASTM D2261
Tear strength (TD)	79 N	18 lbs	ASTM D2261
Adhesion Strength (min)	80-89 N/50mm	18-20 lbs/2in	ASTM D 751
Abrasion Resistance (min)	1500 cycles / 3.75 % weight loss, fact up to 3500	1500 cycles / 3.75 % weight loss, fact up to 3500	ASTM D 3889 H-18 Wheel set
Temperature resistance, 30min test	170 °C	340 °F	
Roll width	Custom: 37-200mm; Jumbo roll: 1.4m	Custom: 1.5-8"; Jumbo roll: 55"	
Roll length	200 m custom roll length is available	219 yards custom roll length is available	
Color	Black matt (standard). Custom colors are available		
Optional treatments	Anti static, Flame retardant, UV resistant treatments are available by special request		

### Remarks:

1. The data above are typical results and subject to change without notice.
2. Tolerance: Weight and Thickness: ±10%; Width: ±3mm; Length: Cut Roll & Log Roll ±0.3m, Jumbo Roll ±0.5%.
3. The product should be stored at room temperature and kept away from sources of heat, moisture, chemicals and out of direct sunlight. Storage: 20 +/-5 °C (59-77°F) and relative humidity and 50 +/-10%.
4. The user should make tests and do trial-application of the products before application to ensure suitability for user's special purpose and technique.
5. Weaving (yarn direction): Warp (MD) / weft (TD)



CT PLAST

1-604-277-6643  
186-8120 No. 2 Road  
Richmond, BC  
V7E 3E6, Canada