

CT-FF2520-B5


SELF-ADHESIVE FIBERGLASS MESH REINGORCED ALUMINUM FOIL TAPE

FEATURES:

- ◆ Very high tensile and tear strength
- ◆ Strong rubber adhesive Temperature and aging resistance
- ◆ Excellent reflection of heat and light, Good water vapor resistance

TYPICAL APPLICATION:

- ◆ To seal joints of insulation facings with bi-directional reinforcement or duct joints in construction and ventilation

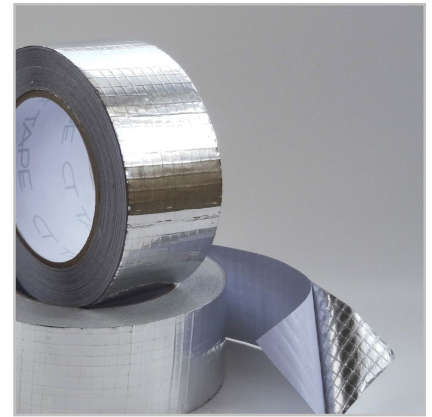

Construction		<ul style="list-style-type: none"> ◆ Aluminum Foil ◆ 2 way scrim (mesh) 5 x 5 mm ◆ Rubber adhesive ◆ Silicone release paper liner 		
		PROPERTIES	Metric	English
	Foil Thickness	25 Micron	1.0 mil	PSTS-133 / ASTM D 3652
	Total Thickness (Backing + Adhesive)	90 Micron	3.6 mil	PSTS-133 / ASTM D 3652
	Peel Adhesion to Steel	> 20 N/25mm	> 72 Oz/inch	PSTC-101 / ASTM D 3330
	Rolling Tack (11 mm ball)	20 cm	7.9 inch	PSTC-6 / ASTM D 3121
	Tensile strength	120 N/25 mm	27.3 Lb/inch	PSTC-131 / ASTM D 3759
	Elongation	3%	3%	PSTC-131 / ASTM D 3759
	Service Temperature	-20 ~ +80 °C	-4 ~ + 176 °F	-----
	Core I.D.	76mm	3"	
	Roll width	48mm, 50mm (2"), 60mm, 63mm (2.5"), 72mm, 75mm (3"), 96mm, 100mm (4")		
	Roll length	45m (50 yards), 50m		

1. The data above are typical results from tests conducted on samples taken from production runs and may be updated without notice. Typical values are not intended to be used for specification development.
2. The product should be stored in the original packaging material at 20 +/- 5°C and 40-60% relative humidity and protected from direct sunlight, heat and moisture. Shelf life: One year when stored at the conditions described above.
3. The surface to which the tape is applied must be clean, dry, free of grease and oil and other contaminants and deposits. Recommended temperature of application: 50 – 105 °F (10 – 40 °C).
4. The user is responsible for determining whether the product is fit for a particular surface and suitable for user's application. The user should make necessary tests and trial-application of the tape to confirm suitability for user's special purpose and method of application.
5. Self adhesive tapes are designed for sealing applications only. In the instance when the sides of the joint are subject to mechanical stress, both sides should be securely positioned using appropriate fasteners or hangers prior to the self adhesive tapes application.
6. Calem Technology warranty that the product is free from defects in material and workmanship. Should any failure to conform to this warranty appear within one year after the initial date of shipment, Calem Technology shall, upon notification thereof and substantiation that the product have been stored and applied in accordance with the above requirements, at Calem Technology discretion, replace or credit the product's purchasing price equivalent.
7. Limitation of liability. Calem Technology Inc. and seller of CT Tape products will not be liable for any loss or damage arising from the CT Tape product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



1-604-277-6643
 186-8120 No. 2 Road
 Richmond, BC
 V7E 3E6, Canada